

EL SISTEMA
ALUPLAST
IDEAL NEO MD NEW

Slim and symmetrical profiles refer to current design trends and give lightness and elegance to the windows. Extremely narrow profile combinations mean even more light in the rooms. An attractive solution for both new built and renovation.



TECHNICAL DATA



76 mm
installation depth



Uw 0,76 W/(m²K)*
thermal transmittance




Rw 36 dB
soundproofing

*More data at page 89.



SYSTEM STRUCTURE

6-chamber **b-class** sash profile with a frame depth of 76 mm.

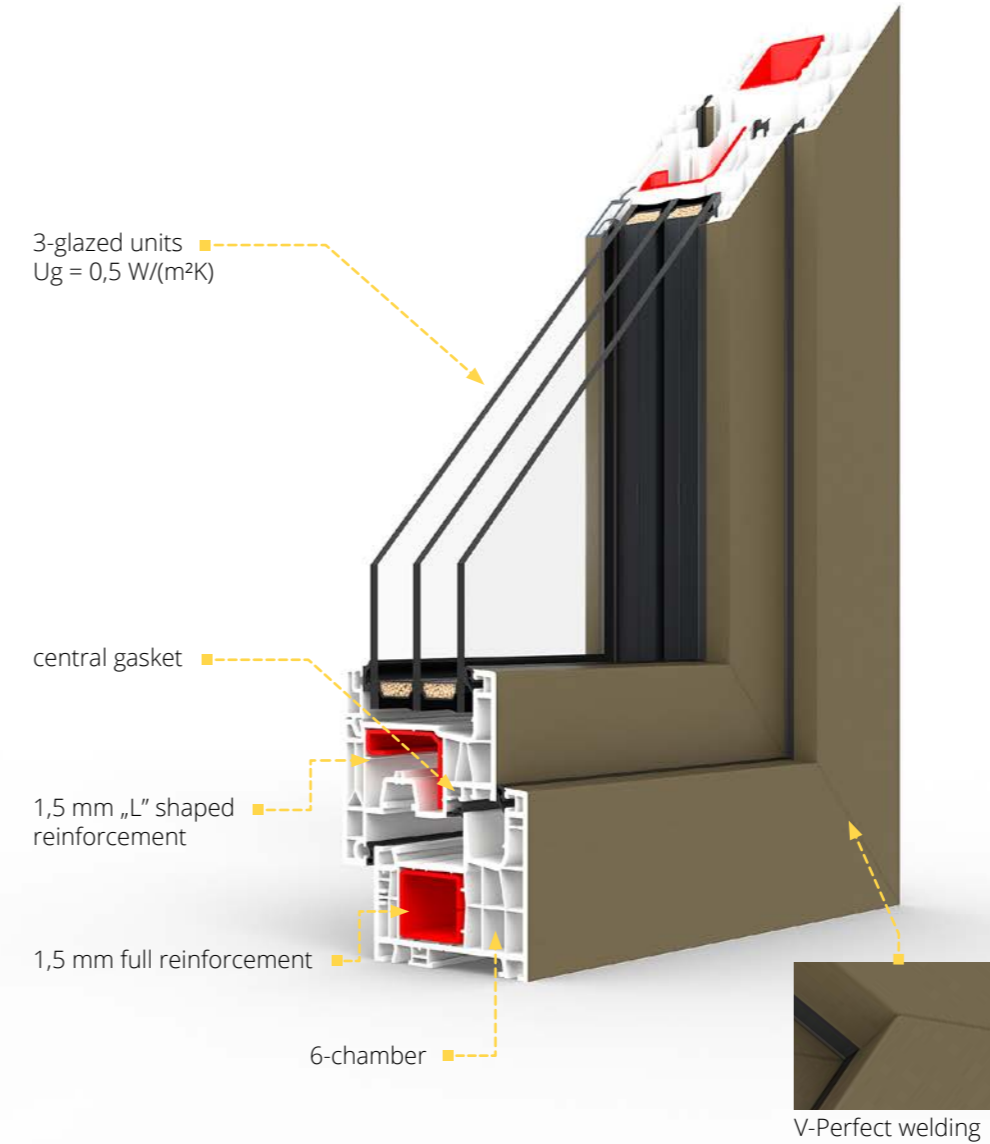

Standard:

- 3-glazed (2-chamber) units infilled with argon gas, with Ug = 0.5 W/(m²K)
- Swisspacer Ultimate plastic warm frame - as a free elective option
- 4 anti-theft strikers according to the size of the sash and the hardware system
- microventilation
- aluminium window handle
- handle misplacement locking mechanism
- perimeter, glazing and central gaskets in black or grey
- filling of the lower hardware groove



ADDITIONAL OPTIONS



option of using glazed units with a thickness from 24 mm to 54 mm



option of using glass panes with improved sound insulation, laminated (safety and anti-burglary), ornamental, solar control, mirror and sandblasted



wide range of colours of decorative films, option to cover the window on both sides (two the same or different colours) or only one side (str. 80)



possibility of using hidden hinges



handles for windows with movable post



turn lock



option of providing Smart Home automation (str. 86)



option of using 27 mm, 45 mm or 65 mm wide PVC glued on muntin bars and 8 mm, 18 mm, 26 mm or 45 mm wide aluminium internal muntin bars (str. 66)



szeroka gama profili dodatkowych (łączników, poszerzeń, profili pod parapet)



available with roller shutters, Venetian blinds and mosquito nets (str. 94)



option of using ventilators (p. 78)

