

WINDOW SYSTEM DUOLINE

These windows are a perfect combination of timeless classics of wood with a light and extremely durable form of aluminium .

Many additional options allow you to create windows that will meet all your expectactions.



Additional options p. 72

TECHNICAL DATA



68/78/88 mm

installation

depth

Uw = 0,79 - 0,90 W(m²K)*

thermal transmittance

gaskets


<u>/</u>____

3

*More data at page 75.

SYSTEM STRUCTURE

Choice of profiles: 68 mm, 78 mm, 88 mm in two types of wood: three- or four-layer solid scantling: meranti with a density of over 450 kg/m³ or pine.

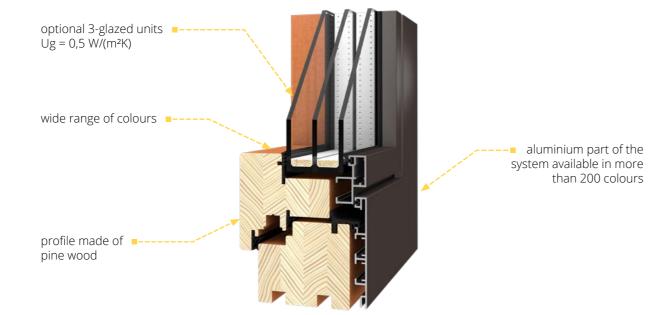

Standard:

- MACO MULTI-MATIC KS fittings with 2 anti-theft strikers with Silber-Look anti-corrosion coating for longlasting protection and smooth operation of the fitting
- sash lifter (lifting mishandling device depending on window height)
- microventilation in tilt and turn windows
- hinge covers in 4 colours: white, silver, light brown, brown
- 3 gaskets
- 2-glazed (1-chamber) units infilled with argon gas with $Ug = 1.1 W/(m^2K)$
- glass-pane spacer made of galvanised steel
- drip cap facilitating water drainage
- aluminium handle
- standard colours for the wooden part of the window p. 64, for aluminium RAL matt color: white (9016), anthracite (7016)

