

This is the perfect solution for those looking for window joinery that will provide the right level of light in the room. The tilt and slide system is characterised by ease of use and very good thermal and sound insulation parameters.



**TECHNICAL DATA**



70 mm  
installation  
depth



Uw 0,81 W(m<sup>2</sup>K)\*  
installation  
depth


\*More data at page 91.




**SYSTEM STRUCTURE**

5-chamber frame and sash profiles made exclusively of primary material in Class A, with an installation width of 70 mm with a double gasket: external, internal with EPDM

**IGLO 5 PSK**

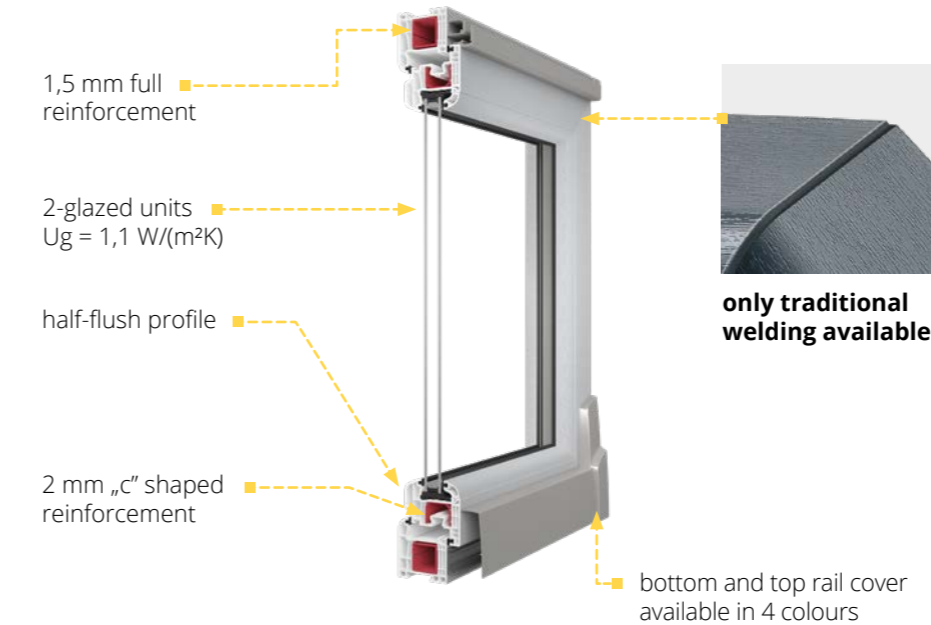

**IGLO 5 CLASSIC PSK**

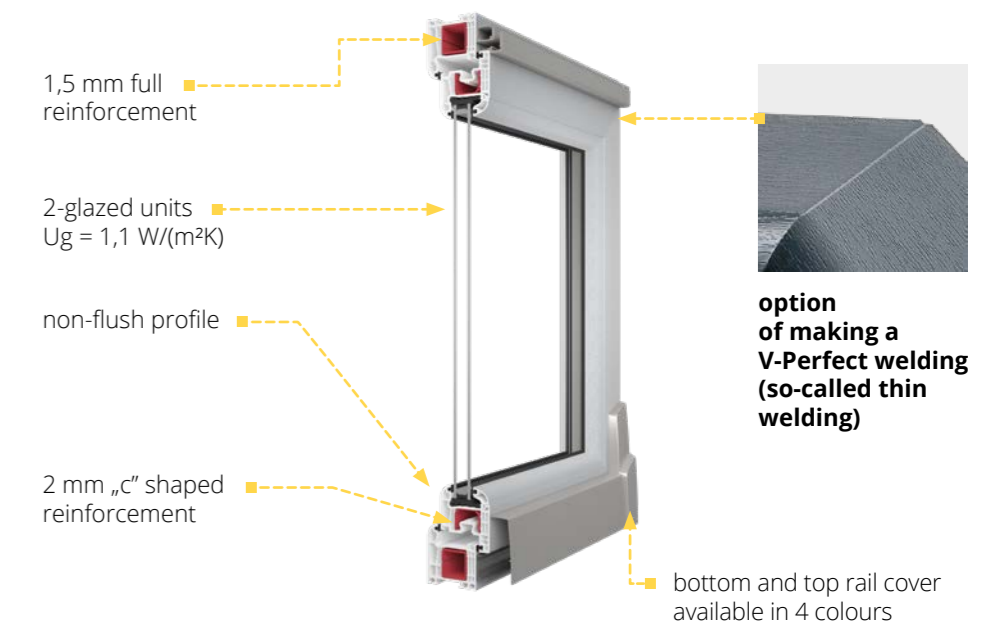

**Standard:**

- MACO SKB-S System Standard fittings for window sashes weighing up to 160 kg
- 2-glazed (1-chamber) units infilled with argon gas with Ug = 1.1 W/(m<sup>2</sup>K)
- Rail cover available in 4 colours: silver, white, light brown and brown
- profile core in white
- galvanised steel glass-pane spacer optional Swisspacer Ultimate glass-pane spacer

- frame profile height 75 mm
- 2 EPDM gaskets in black (external and internal)
- gasket filling the lower fittings groove
- 1.5 mm (closed) steel frame reinforcement, 2 mm „c“-shaped steel sash reinforcement
- aluminium handle, available with key option
- 5-chamber PVC under-sill trim with gasket

## ADDITIONAL OPTIONS



option of using glazed units from 24 mm to 48 mm thick



option of using glass panes with increased sound insulation, laminated glass, (safety and anti-burglary), ornamental glass, solar control glass, mirrored glass and sandblasted glass



option of using the Swisspacer Ultimate glass-pane spacer available in 3 colour variants (p. 84)



wide range of colours of decorative films, option to cover the window on both sides (two the same or different colours) or only one side (p. 80)



option of selecting gaskets in grey



option of using a rectangular glazing bead - only for 24 mm glazing (p. 85)



option of using the MACO SKB-Z automatic fitting which supports closing of the tilt.



option of using 27 mm, 45 mm or 65 mm wide PVC glued on muntin bars and 8 mm, 18 mm, 26 mm or 45 mm wide aluminium internal muntin bars (p. 66)



3-glazed (2-chamber) units infilled with argon gas, with  $U_g = 0.6 \text{ W/(m}^2\text{K)}$



option of making windows in V-Perfect technology (so called thin welding)- only for Iglo 5 Classic PSK



Handle on both sides - only for the Iglo 5 Classic system



available with roller shutters, Venetian blinds and mosquito nets (p. 94)



option of selecting a profile core in brown

